




KONICA MINOLTA

TECHNOLOGY

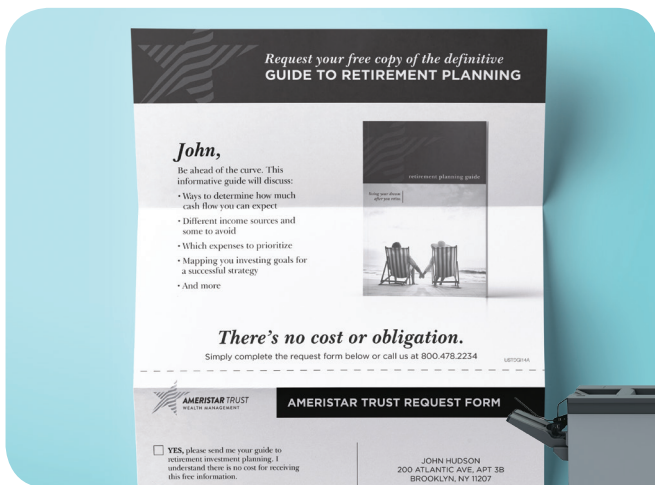

# AccurioPress 6136P

MONOCHROME DIGITAL PRODUCTION PRESS

- 136 ppm output for high-volume monochrome print production
- Inline, closed loop quality management system
- Job ticket and page editing from 15" touch-screen display for easy on-board press control
- Color Centro and Hot Folder capabilities for job management and workflow
- True 1,200 x 1,200 dpi resolution with enhanced screening technologies for sharpness
- Duty cycle 3,240,000 — accepts media up to 350 gsm
- Reliable air-suction paper feed option for smooth paper feeding
- Professional feeding of coated media and envelopes
- 18,000-sheet maximum paper capacity with options

- Humidifier option removes static, reduces paper curl
- Saddle-stitched booklets with three-side trim and square-fold
- Produce 600-page perfect bound books and up to 100-sheet stapling
- Envelope print support with optional fuser
- Innovative GBC punch unit with interchangeable die sets
- Built-in print controller with PCL, PostScript, TIFF and PDF
- Simitri® HD toner with Biomass to protect the environment
- EPEAT Gold-certified — U.S. Energy Star compliant

# AccurioPress 6136P

## MONOCHROME DIGITAL PRODUCTION PRESS

The AccurioPress 6136P means business with up to 136 ppm print output, a monthly duty cycle of over three million impressions and up to 18,000 sheet capacity. With real-time automated density and registration adjustments and powerful multiple inline finishing options, it gives you all the tools you need to grow your business.

### SYSTEM SPECIFICATIONS

<b>Resolution</b>	<b>Print:</b> 1,200 x 1,200 dpi
<b>Paper weight</b>	<b>Standard:</b> 40–300 gsm <b>Opt.:</b> PF-710, PF-709 (middle tray) – 40–350 gsm
<b>Auto duplex</b>	40–300 gsm
<b>Paper sizes (max.)</b>	324 x 463 mm (12.76" x 18.23") <b>Opt.:</b> PF-709 – 324 x 463 mm (12.76" x 18.23") PF-710 – 324 x 483 mm (12.76" x 19.02")
<b>Paper sizes (min.)</b>	182 x 139 mm (7.17" x 5.47") <b>Opt.:</b> PF-709 – 95 x 139 mm (3.74" x 5.47") PF-710 – 95 x 133 mm (3.74" x 5.24")
<b>Image loss (max.)</b>	3.0 mm or less for top edge 2.0 mm or less for bottom edge 2.0 mm or less for right/left edges
<b>Warm-up time</b>	420 seconds or less
<b>Paper input capacity</b>	<b>Standard:</b> 3,000 sheets <b>Max.:</b> 18,000 sheets
<b>Main unit dimensions (W x D x H)</b>	39" x 35.8" x 57"
<b>Main unit weight</b>	761 lbs
<b>Power requirements</b>	208VAC to 240VAC, 20A, 60 Hz

### PRODUCTIVITY

<b>8.5" x 11" (max. per minute)</b>	136 ppm
<b>Monthly duty cycle (max.)</b>	3,240,000 pages

### CONTROLLER

<b>Type</b>	Embedded (network standard)
<b>CPU</b>	Intel i5-4570S 2.9 GHz
<b>Memory</b>	16 GB
<b>HDD/SSD</b>	HDD: 1-TB x2, SSD: 4 GB
<b>Print-description language</b>	PCLSE/XL (PCL6), Adobe PostScript3 (PS3020), PDF v1.7, TIFF v6, PPML v2.2, APPE4.2 (with UK-217)
<b>Printing method</b>	TCP/IP (LPR, RAW socket), NetBEUI, IPP, WSD, Bonjour, SMB
<b>Applicable OS</b>	PCL, PS, PS Plug-in: Windows 7 <sup>*1</sup> /8.1 <sup>*1</sup> /10 <sup>*1</sup> Windows Server 2008/2008R2/2012/2012R2/2016 Mac OS X 10.8 /10.9/10.10/10.11/10.12
<b>Interface</b>	10/100/1000Base-T, USB3.0 host, USB2.0 device

<sup>\*1</sup> Including 64-bit versions.

### OPTIONS

<b>CR-101</b>	Creaser unit for SD-513	<b>MK-732</b>	Post-inserter mount kit for FS-532
<b>EF-105</b>	Envelope fuser	<b>MK-737</b>	Mount kit for third-party products
<b>FA-503</b>	PFU adjustment kit	<b>OT-510</b>	Open stacker
<b>FD-503</b>	Multi-fold punch unit	<b>PB-503</b>	Perfect binder
<b>FD-504</b>	Square folding unit for SD-513	<b>PF-709</b>	Friction paper feed unit w/air assist
<b>FS-532</b>	100-sheet staple finisher	<b>PP-701</b>	Pre-printed paper kit for PF-709
<b>FS-532 PK/SD</b>	100-sheet staple finisher with PK and SD-510-522	<b>PF-710</b>	Vacuum paper feed unit
<b>Punch G2</b>	GBC advanced multi-punching unit	<b>PI-502</b>	Post inserter for FS-532
<b>GP-501</b>	GBC multi-hole punch unit	<b>PK-522</b>	2/3-hole punch for FS-532
<b>GP-502</b>	GBC in-line ring binding unit	<b>RH-101</b>	Removable HDD kit
<b>HD-523</b>	Inner HDD kit	<b>RU-510</b>	Relay unit for GP-501
<b>HM-103</b>	Humidification unit for RU-518	<b>RU-518</b>	Relay unit for de-curling
<b>HT-506</b>	Dehumidification heating unit for PF-710	<b>SD-506</b>	Booklet making unit
<b>IQ-501</b>	Intelligent quality optimizer	<b>SD-510</b>	Saddle stitch kit for FS-532
<b>LC-501</b>	Cart for LS-506	<b>SD-513</b>	Saddle stitch unit
<b>LS-506</b>	Stacking unit	<b>SD-513/F</b>	Saddle stitcher front
		<b>TU-503</b>	Trimmer unit for SD-513



For complete information on Konica Minolta products and solutions, please visit: [CountOnKonicaMinolta.com](http://CountOnKonicaMinolta.com)

© 2018 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA and the KONICA MINOLTA logo are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design & specifications are subject to change without notice.



KONICA MINOLTA

KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC.  
100 Williams Drive, Ramsey, New Jersey 07446

[CountOnKonicaMinolta.com](http://CountOnKonicaMinolta.com)



Item #: AP6136PSS  
2/2018-C